

AN14114

RF Test Mode on Linux OS

Rev. 5.0 — 7 February 2025

Application note

Document information

Information	Content
Keywords	RF test mode, production firmware, regulatory, compliance
Abstract	Describes how to enable and use RF test mode on Linux OS.



1 Introduction

This document provides an overview of how to enable and use the RF test mode on a Linux host. RF test mode feature is used to set RF parameters for transmit and receive testing for regulatory compliance. The feature is available for use on the production software.

RF test mode is compatible with Wi-Fi, Bluetooth, and 802.15.4 radios.

Note: This document assumes that you are familiar with [\[2\]](#) and that you have used the production firmware to bring up the radios on your device.

1.1 Supported devices

- 88W8987
- 88W8997
- 88W9098
- AW611
- IW416
- IW610
- IW611
- IW612

Note: For more information on the software compatibility, refer to the software release notes of your device.

2 Wi-Fi RF test mode

This section describes the commands to use RF test mode for Wi-Fi on the i.MX 8M Quad EVK with Linux. The commands apply to any Linux-based host.

Wi-Fi RF test mode commands can be set by using the echo command to pass parameters to a configuration file located in the `/proc/mwlan/adapterX/config` directory.

Note: In the command examples, `adapter0` refers to the Wi-Fi device name. To check your device name, refer to the `/proc/mwlan/` directory for `adapterX` after loading the drivers and firmware. Adjust this parameter for your device.

2.1 List of commands for Wi-Fi RF test mode

[Table 1](#) lists the commands available for RF test mode of Wi-Fi.

Table 1. List of commands for Wi-Fi RF test mode

Command
Enable RF test mode and check RF parameters
Set TX/RX antenna configuration
Set the radio mode
Set the operating RF band
Set the channel bandwidth
Set the RF channel
Get and reset the packet error rate
Set TX power
Set TX continuous mode
Set TX frame
Testing 802.11ax Uplink-OFDMA transmit

2.2 Enable RF test mode and check RF parameters

RF test mode must be enabled before setting other RF test mode parameters.

Command to **enable** RF test mode:

```
echo "rf_test_mode=1" >> /proc/mwlan/adapter0/config
```


Command to **disable** RF test mode:

```
echo "rf_test_mode=0" >> /proc/mwlan/adapter0/config
```

Command to check your set RF test mode parameters by printing the contents of the configuration file:

```
cat /proc/mwlan/adapter0/config
```

[Figure 1](#) shows the example of RF test mode enabled, with the output value of `rf_test_mode=1` in the configuration file.

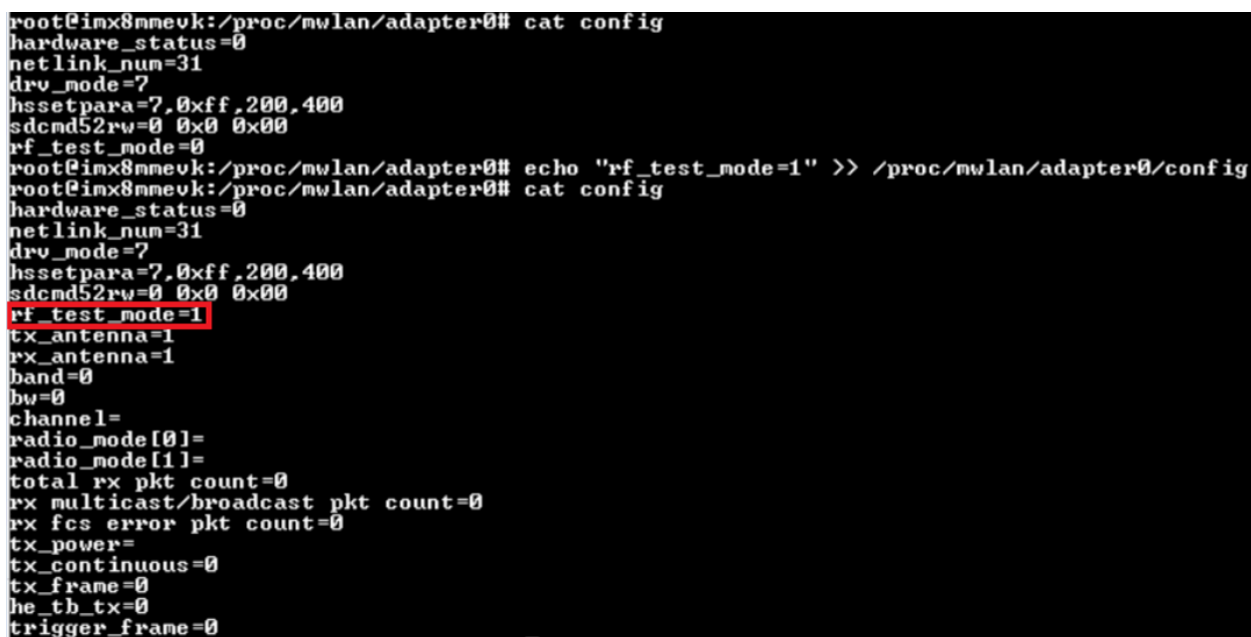

```
root@mx8mmevk:/proc/mwlan/adapter0# cat config
hardware_status=0
netlink_num=31
drv_mode=7
hssetpara=7,0xff,200,400
sdcmd52rw=0 0x0 0x00
rf_test_mode=0
root@mx8mmevk:/proc/mwlan/adapter0# echo "rf_test_mode=1" >> /proc/mwlan/adapter0/config
root@mx8mmevk:/proc/mwlan/adapter0# cat config
hardware_status=0
netlink_num=31
drv_mode=7
hssetpara=7,0xff,200,400
sdcmd52rw=0 0x0 0x00
rf_test_mode=1
tx_antenna=1
rx_antenna=1
band=0
bw=0
channel=
radio_mode[0]=
radio_mode[1]=
total rx pkt count=0
rx multicast/broadcast pkt count=0
rx fcs error pkt count=0
tx_power=
tx_continuous=0
tx_frame=0
he_tb_tx=0
trigger_frame=0
```

Figure 1. Example of command output with `rf_test_mode` enabled

2.3 Set TX/RX antenna configuration

Command to set the antenna configuration for **transmission mode**:

```
echo "tx_antenna=<mode>" >> /proc/mwlan/adapter0/config
```

Command to set the antenna configuration for **receive mode**:

```
echo "rx_antenna=<mode>" >> /proc/mwlan/adapter0/config
```

Table 2. Command parameters

Parameter	Description
TX mode	TX antenna 1 = Path A 2 = Path B 3 = Paths A and B Note: For 1x1 devices, select Path A.
RX mode	RX antenna 1 = Path A 2 = Path B 3 = Paths A and B Note: For 1x1 devices, select Path A.

Example of command to set the antenna configuration for transmission mode (Path A):

```
echo "tx_antenna=1" >> /proc/mwlan/adapter0/config
```

Example of command to set the antenna configuration for receive mode (Path B):

```
echo "rx_antenna=2" >> /proc/mwlan/adapter0/config
```

2.4 Set the radio mode

Command to set the radio mode:

```
echo "radio_mode=<index for radio 0> <index for radio 1>" >> /proc/ mwlan/adapter0/config
```

Note: This command is only for 88W9098, AW611, IW611, and IW612.

[Table 3](#) lists the radio mode indexes for 88W9098.

Table 3. Radio mode index values for 88W9098

Radio mode index	Band and antenna path configuration
0	Sets the radio in power down mode. Note: Radio mode index for devices with dual Wi-Fi radios only.
1	Sets the radio in 5 GHz band, 2x2 mode (Path A+B) Note: Radio mode index for devices with dual Wi-Fi radios only.
3	Sets the radio in 5 GHz band, 1x1 mode (Path A)
4	Sets the radio in 5 GHz band, 1x1 mode (Path B)
9	Sets the radio in 2.4 GHz band, 2x2 mode (Path A+B) Note: Radio mode index for devices with dual Wi-Fi radios only.
11	Sets the radio in 2.4 GHz band, 1x1 mode (Path A)
14	Sets the Radio in 2.4 GHz band, 1x1 mode (Path B)

Example of command to set the radio 0 in 5 GHz band with 2x2 mode, and radio 1 in power down mode:

```
echo "radio_mode=1 0" >> /proc/mwlan/adapter0/config
```

Example of command to set the radio 0 in power down mode, and radio 1 in 2.4 GHz band with 2x2 mode:

```
echo "radio_mode=0 9" >> /proc/mwlan/adapter1/config
```

[Table 4](#) lists the radio mode indexes for AW611, IW611, and IW612.

Table 4. Radio mode index values for AW611, IW611, and IW612

Radio mode index	Description
3	Radio in 5 GHz band
11	Radio in 2.4 GHz band

Note: In the following examples, the “radio index 1” is set to 0 as IW612 device has only one Wi-Fi radio.

Example of command to set the Wi-Fi radio in 5 GHz band for an IW612:

```
echo "radio_mode=3 0" >> /proc/mwlan/adapter0/config
```

Example of command to set the Wi-Fi radio in 2.4 GHz band for an IW612:

```
echo "radio_mode=11 0" >> /proc/mwlan/adapter0/config
```

2.5 Set the operating RF band

Command to set the RF band:

```
echo "band=<RF band>" >> /proc/mwlan/adapter0/config
```

Table 5. Command parameters

Parameter	Definition
RF band	RF band 0 = 2.4 GHz 1 = 5 GHz

Example of command to set the RF band to 5 GHz:

```
echo "band=1" >> /proc/mwlan/adapter0/config
```

2.6 Set the channel bandwidth

Command to set the channel bandwidth:

```
echo "bw=<bandwidth>" >> /proc/mwlan/adapter0/config
```

Table 6. Command parameters

Parameter	Definition
bandwidth	Channel bandwidth 0 = 20 MHz 1 = 40 MHz 4 = 80 MHz

Example of command to set the channel bandwidth to 20 MHz:

```
echo "bw=0" >> /proc/mwlan/adapter0/config
```

2.7 Set the RF channel

Command to set the RF channel:

```
echo "channel=<ch>" >> /proc/mwlan/adapter0/config
```

Table 7. Command parameters

Parameter	Definition
ch	RF channel of operation Note: For more information on the supported RF channels, refer to Section 2.14 .

Example of command to set the RF channel to 6:

```
echo "channel=6" >> /proc/mwlan/adapter0/config
```

2.8 Get and reset the packet error rate

Command to get and reset the packet error rate in the configuration file:

```
echo "get_and_reset_per" >> /proc/mwlan/adapter0/config
```

Command to verify the packet count parameters:

```
cat /proc/mwlan/adapter0/config
```

Command output example:

```
hardware_status=0 netlink_num=31 drv_mode=7 sdcmd52rw=0 0x0 0x00 rf_test_mode=1
TX_antenna=1 RX_antenna=1
band=1 bw=0 channel=36
radio_mode[0]= radio_mode[1]=
total RX pkt count=500
RX multicast/broadcast pkt count=500
RX fcs error pkt count=0
TX_power=
TX_continuous=0
TX_frame=0
he_tb_TX=0
```

The bold text in the command output example shows the packet count data after 500 packets were received by the DUT. The command output includes the total packet count, the multicast/broadcast packet count, and the frame check sequence (FCS) error packet count.

2.9 Set TX power

Command to set the TX power:

```
echo "tx_power=<power> <modulatio> <path id>" >> /proc/mwlan/adapter0/config
```

Table 8. Command parameters

Parameter	Definition
power	Transmit power level in dBm Integer range of -1 to 24 -1 = power level is determined by the firmware and accounts for country code restrictions Else = user input power level
modulation	Signal modulation 0 = CCK 1 = OFDM 2 = MCS
path id	TX signal path name 0 = path A 1 = path B 2 = path A + path B Note: For 1x1 devices, select Path A.

Example of command to set the TX power to 16 dBm using MCS modulation on path A:

```
echo "tx_power=16 2 0" >> /proc/mwlan/adapter0/config
```

Example of command to determine the power level by firmware with OFDM modulation on path B:

```
echo "tx_power=-1 1 1" >> /proc/mwlan/adapter0/config
```

Note: If the power level is set to -1 and the current channel is not allowed in the set country code, the command returns an error.

2.10 Set TX continuous mode

Command to set the TX continuous mode parameters:

```
echo "tx_continuous=<start/stop> <continuous wave mode> <payload pattern> <cs mode>
<active subchannel> <TX data rate>" >> /proc/mwlan/adapter0/config
```

Table 9. Command parameters

Parameter	Definition
start/stop	Start/stop transmit 0 = disable 1 = enable
transmit mode	Transmit mode 0 = continuous packet mode 1 = continuous wave mode
payload pattern	Payload pattern value in the range of 0 to 0xFFFFFFFF.
cs mode	TX Carrier Suppression (CS) enable *Applicable only when continuous packet mode is set 0 = disable 1 = enable
active subchannel	Active sub-channel 0 = low 1 = upper 3 = both
TX data rate	Transmit data rate index corresponding to legacy/HT/VHT rates (Section 2.13).

Example of command to start TX continuous mode in continuous packet mode with 0xAAA payload pattern, TX carrier suppression disabled, both subchannels active, and a data rate of 12 Mbps:

```
echo "tx_continuous=1 0 0xAAA 0 3 0x7" >> /proc/mwlan/adapter0/config
```

Example of command to stop TX continuous mode in continuous packet mode:

```
echo "tx_continuous=0" >> /proc/mwlan/adapter0/config
```

Example to start continuous wave mode:

```
echo "tx_continuous=1 1 0xAAA 0 3 0x7" >> /proc/mwlan/adapter0/config
```

Example of command to stop continuous wave mode:

```
echo "tx_continuous=0 1 0xAAA 0 3 0x7" >> /proc/mwlan/adapter0/config
```

2.11 Set TX frame

Command to set the TX frame parameters

```
echo "tx_frame=<start/stop> <TX data rate> <payload pattern> <payload length> <adjust
burst SIFS gap> <adjust SIFS> <short preamble> <active subchannel> <short GI> <adv
coding> <beamforming> <greenfield mode> <STBC> <Signal Bw> <NumPkt> <MaxPktExt>
<BeamChange> <DCM> <Doppler> <MidamblePeriod> <QNum> <BSSID>" >> /proc/mwlan/adapter0/
config
```

Table 10. Command parameters

Parameter	Definition
start/stop	Start/stop transmit 0 = disable 1 = enable
TX data rate	Transmit the data rate index corresponding to the legacy/HT/VHT rates (Section 2.13).
payload pattern	Payload pattern value in the range of 0 to 0xFFFFFFFF.
payload length	Payload length value in the range of 1 to 0x400.
adjust burst SIFS gap	Adjust burst SIFS gap enable 0= disable (default) 1 = enable
adjust SIFS	Burst SIFS duration in microseconds range of 10 μ s (default) to 255 μ s
short preamble	Short preamble enable 0= disable (default) 1 = enable
active subchannel	Active subchannel selection 0 = lower (default) 1 = upper 3 = both
short GI	Enable short guard interval. - For 802.11ac: 0 = GI 0.4 μs 1 = GI 0.8 μs - For 802.11ax: 0 = 1xHELTf + GI 0.8 μs 1 = 2xHELTf + GI 0.8 μs 2 = 2xHELTf + GI 1.6 μs 3 = 4xHELTf + GI 0.8 μs (if DCM = 1 and STBC = 1) 3 = 4xHELTf + GI 3.2 μs (if DCM = 0 and STBC = 0) - For 802.11ax HE MU PPDU: 0 = 4xHELTf + GI 0.8 μs 1 = 2xHELTf + GI 0.8 μs 2 = 2xHELTf + GI 1.6 μs 3 = 4xHELTf + GI 3.2 μs^[1]

Table 10. Command parameters...continued

Parameter	Definition
adv coding	Advanced coding 0 = disable (default) 1 = enable Note: Set 1 (enable) for 802.11ax MCS10/MCS11, 40 MHz/80 MHz configuration test.
beamforming	Beamforming enable 0 = disable (default) 1 = enable
greenfield mode	Greenfield mode enable 0 = disable (default) 1 = enable
STBC	Space time block coding enable 0 = disable (default) 1 = enable
Signal Bw ^[2]	Signal bandwidth 0 = 20 MHz 1 = 40 MHz 4 = 80 MHz -1 = Set to default
NumPkt	Number of packets. Set to default value -1.
MaxPktExt	Max packet extension. Set to default value -1.
BeamChange	Beam change Set to default value -1.
DCM	DCM enable Set to default value -1.
Doppler	Doppler enable Set to default value -1.
MidamblePeriod	Midamble periodicity Set to default value -1.
QNum	Transmit queue number that holds the trigger-based response packets. Set to default value -1.
BSSID	Basic service set identifiers Format: xx:xx:xx:xx:xx:xx

- [1] – The short preamble field should be set to 2 for HE MU 3.2 μ s GI case, and to 0 for HE SU case.
 – The tx_frame command parameters DCM and STBC fields must not be set to 1 for HE SU 3.2 μ s. If DCM and STBC fields are set to 1, the short GI is set to 0.8 μ s.
- [2] The command in [Section 2.6](#) is used to set the channel bandwidth whereas the bandwidth set using tx_frame parameter is for the signal. If the signal bandwidth is set to -1 or greater than the channel bandwidth, the signal bandwidth will be set to be the same as the channel bandwidth.

Example of command to start TX frame with at 12 Mbps, 0xAAA payload pattern, and a packet length of 0x256:

```
echo "tx_frame=1 0x7 0xAAA 0x256 0 20 0 0 0 0 0 0 -1 -1 -1 -1 -1 -1 -1 -1
05:43:3f:c4:51" >> /proc/mwlan/adapter0/config
```

Example of command to stop any ongoing TX frame:

```
echo "tx_frame=0" >> /proc/mwlan/adapter0/config
```

2.12 Testing 802.11ax Uplink-OFDMA transmit

This section shows how to run Uplink (UL)-OFDMA test by using Wi-Fi RF test mode commands. In the standard test setup, two boards are required to accomplish the test. One board, known as the golden unit, is used to transmit the trigger frame to the DUT. The other board is the DUT, which responds to the trigger frame sent by the golden unit.

A standalone test setup with only one board (DUT) used to test UL-OFDMA transmit may also be used. See [Section 2.12.3](#).

Note: This section only applies to devices that support 5 GHz Wi-Fi 6.

2.12.1 Test setup

[Figure 2](#) shows the standard setup for the UL-OFDMA test in the test lab. One i.MX8M Quad (Golden) is used to send a trigger frame and a second i.MX8M Quad (DUT) is used to respond to the trigger frame with a UL-OFDMA signal. A horn antenna receives the UL-OFDMA signal from the DUT and the signal is analyzed with a test receiver.

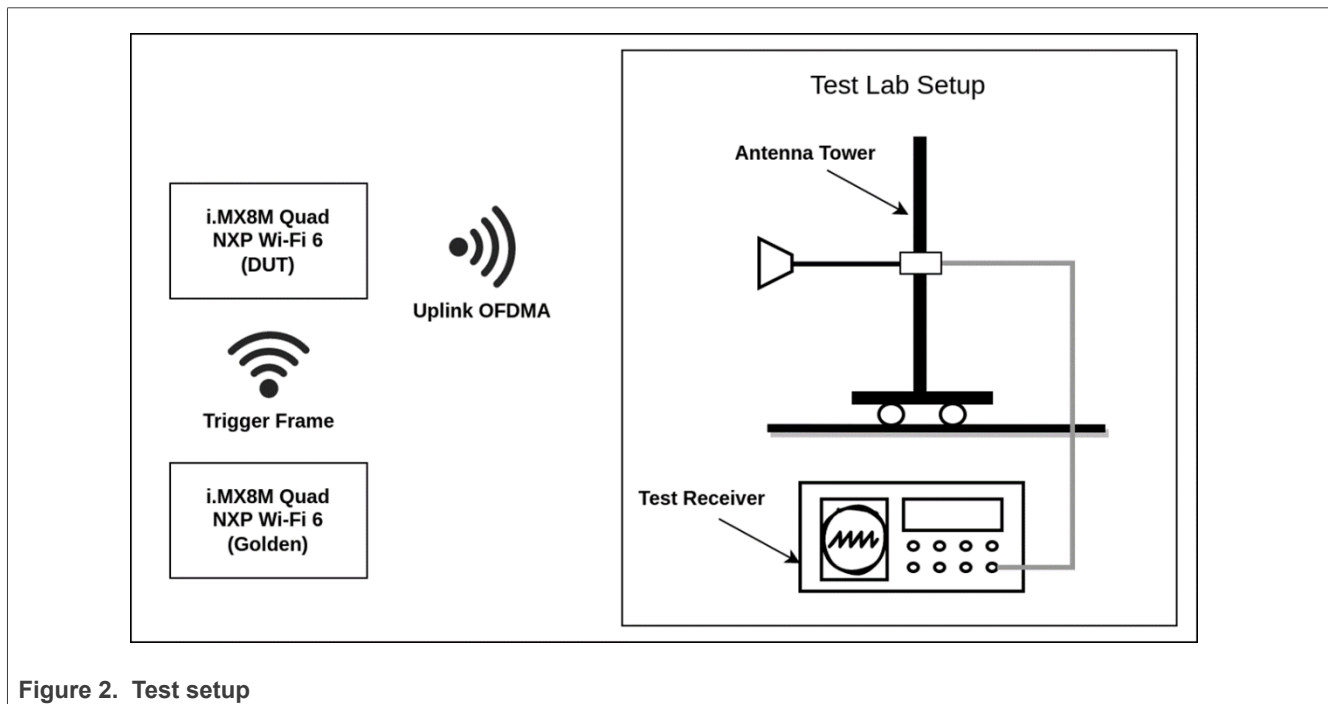


Figure 2. Test setup

2.12.2 Configure the golden unit and DUT for UL-OFDMA transmission

Command to set the trigger frame parameters on the golden unit:

```
echo "trigger_frame=<enable_TX> <standalone_hetb> <frame_ctrl_type> <frame_ctrl_subtype>
<frame_duration> <trigger_type> <ULLen> <MoreTF> <CSRequired> <ULBw> <LTFTType> <LTFTMode>
<LTFSymbol> <ULSTBC> <LdpcESS> <ApTXPwr> <PreFecPadFct> <PeDisambig> <SpatialReuse>
<Doppler> <HeSig2> <AID12> <RUAllocReg> <RUAlloc> <ULCodingType> <ULMCS> <ULDCM><SSAlloc>
<ULTargetRSSI> <MPDU_MU_SF> <TID_AL> <AC_PL> <Pref_AC>" >> /proc/ mwlan/adapter0/config
```

Table 11. Command parameters

Parameter	Definition
enable_TX	Enable transmit 0 = disable 1 = enable
standalone_hetb	Enable standalone UL-OFDMA (Section 2.12.3) 0 = disable 1 = Trigger based UL-OFDMA 2 = Standalone based UL-OFDMA 3 = SU-OFDMA
frame_ctrl_type	Set to 1
frame_ctrl_subtype	Set to 2
frame_duration	Set to 5484
trigger_type	Set to 0
ULLen	Set to 1000
MoreTF	Set to 0
CSRequired	Set to 0
ULBw	Bandwidth 0 = 20 MHz 1 = 40 MHz 2 = 80 MHz
LTFTType	Set to 1
LTFTMode	Set to 0
LTFSymbol	Select the Long Training Field Symbol (LTFS) 0 = 1xHELTF for 1SS 1 = 2xHELTF for 2SS
ULSTBC	Set to 0
LdpcESS	Set to 1
ApTXPwr	Set to 0
PreFecPadFct	Set to 1
PeDisambig	Set to 0
SpatialReuse	Set to 65535
Doppler	Set to 0
HeSig2	Set to 511

Table 11. Command parameters...continued

Parameter	Definition
AID12	Set to 5
RUAllocReg	Set to 0
RUAlloc	RU index. The RU index value for 20 MHz, 40 MHz, and 80 MHz channel bandwidths are shown in Figure 3 , Figure 4 , and Figure 5 respectively.
UlCodingType	Set to 1
UlMCS	MCS data rate. Refer to Section 2.13 .
UlDCM	Set to 0
SSAlloc	Select the spatial stream 0 = 1SS 1 = 2SS
UlTargetRSSI	Set to 90
MPDU_MU_SF	Set to 0
TID_AL	Set to 0
AC_PL	Set to 0
Pref_AC	Set to 0

Note: The DUT transmits UL-OFDMA for each trigger frame it receives. Modify the transmit duty cycle by adjusting the TX time gap of the trigger frames on the golden unit. The RU index and MCS data rate of the UL-OFDMA transmission are based on the received trigger frame.


Table 12 lists the steps and commands for HE-trigger frame generation on the golden unit under the following conditions:



- 5 GHz path A+B
- Channel 36 and 20 MHz channel bandwidth

Table 12. Steps for HE-trigger frame generation on the golden unit

Step	Operation	Command
1	Enable RF test mode	# echo "rf_test_mode=1" >> /proc/mwlan/adapter0/config
2	Set radio mode to 5 GHz (2x2 mode)	# echo "radio_mode=1 0" >> /proc/mwlan/adapter0/config
3	Set the band to 5 GHz	# echo "band=1" >> /proc/mwlan/adapter0/config
4	Set the bandwidth to 20 MHz	# echo "bw=0" >> /proc/mwlan/adapter0/config
5	Set the channel to 36	# echo "channel=36" >> /proc/mwlan/adapter0/config
6	Enable trigger frame with RU index 0, data rate MCS2	# echo "trigger_frame=1 1 1 2 5484 0 1000 0 0 0 1 0 0 0 1 0 1 0 65535 0 511 5 0 0 1 0x2102 0 0 90 0 0 0 0" >> /proc/mwlan/ adapter0/config
7	Start TX_frame Refer to the TX_frame command descriptions in Section 2.11.	# echo "tx_frame=1 0x2102 0xabababab 0x256 0 20 0 0 0 0 0 0 0 -1 -1 -1 -1 -1 -1 -1 05:43:3f:c4:51" >> /proc/mwlan/ adapter0/config

Figure 3, Figure 4, and Figure 5 show the RU index values for the 20 MHz, 40 MHz, and 80 MHz bandwidths respectively.

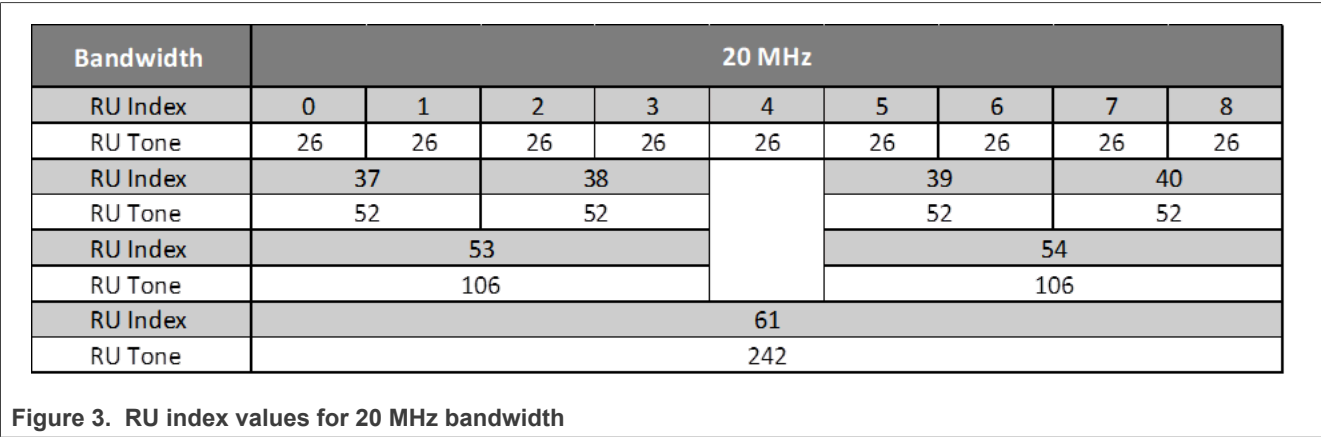

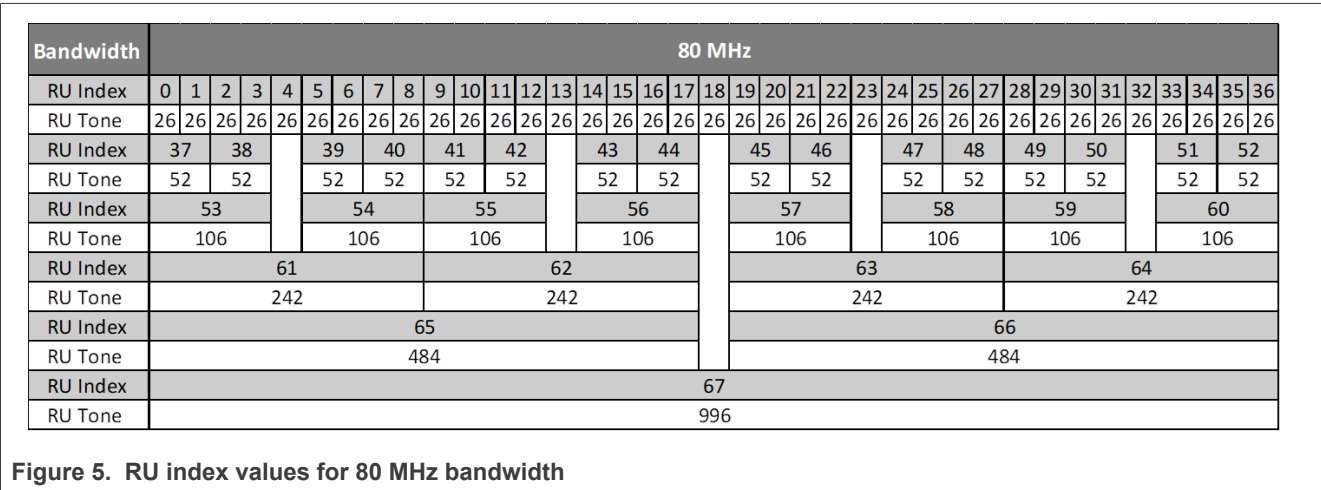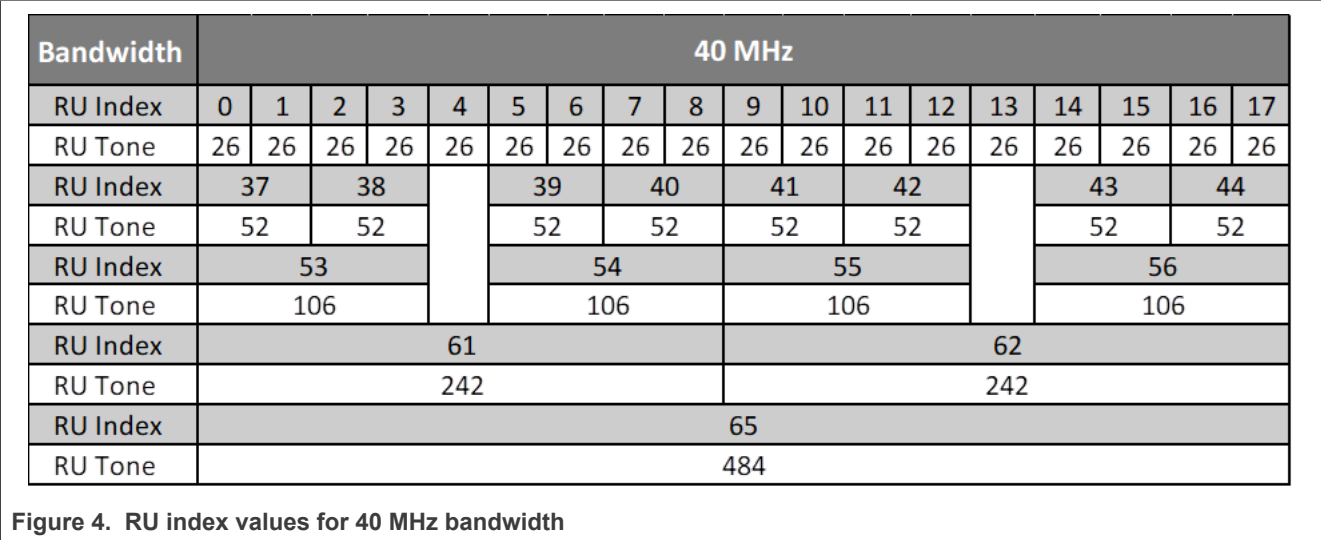

Command to set the trigger frame response parameters on the DUT:

```
echo "he_tb_tx=<enable/exit> <Qnum> <AID> <AXQ0_MU_Timer> <TXPwr>" >> /proc/mwlan/adapter0/config
```

Table 13. Command parameters

Parameter	Definition
enable/exit	Enter/exit trigger frame response mode 0 = exit trigger frame response mode (default) 1 = enter trigger frame response mode
Qnum	Transmit queue number that holds the trigger-based response packets. 1 = trigger-based test (default)
AID	Station ID Value set to 5.
AXQ0_MU_Timer	Arbitrary timer value to ensure SU packets are not transmitted. Units are in 8 ms. Set the value to be larger than the trigger frame interval. It is suggested to set the value to 400 (400 *8 = 3200 ms)
TXPwr	Transmit power in dBm.

[Table 14](#) list the steps and Wi-Fi RF test mode commands for HE-Trigger response frame generation on the DUT.

Table 14. Steps for HE-trigger response frame generation on the DUT

Step	Operation	Command
1	Enable RF test mode	# echo "rf_test_mode=1" >> /proc/mwlan/adapter0/config
2	Set radio mode to 5 GHz (2x2 mode)	# echo "radio_mode=1 0" >> /proc/mwlan/adapter0/config
3	Set the band to 5 GHz	# echo "band=1" >> /proc/mwlan/adapter0/config
4	Set the bandwidth to 20 MHz	# echo "bw=0" >> /proc/mwlan/adapter0/config
5	Set the channel to 36	# echo "channel=36" >> /proc/mwlan/adapter0/config
6	Start HE TB-TX with TX power set to 9 dBm.	# echo "he_tb_tx=1 1 5 400 9" >> /proc/mwlan/adapter0/config
7	Measure the TX-power value and EVM for the HE trigger response frame using an RF tester	

2.12.3 Testing standalone UL-OFDMA

The UL-OFDMA test can also be performed with just the DUT, without the golden unit.

In the standalone OFDMA test:

- The DUT sends UL-OFDMA signals directly without the golden unit.
- The parameter `<standalone_hetb>` is set to 2 for `trigger_frame` command.

Note: This test setup is not typically used compared to the standard setup at the test lab. Consult with your test lab to determine if this test setup can be used for regulatory compliance testing.

[Table 15](#) lists the steps and Wi-Fi RF test mode commands for standalone UL-OFDMA on the DUT. The example applies to Wi-Fi 5 GHz, 1x1 path A, 80 MHz frequency band.

Table 15. Steps for standalone UL-OFDMA test example (Wi-Fi 5 GHz, 1x1 path A, 80 MHz frequency band)

Step	Operation	Command
1	Enable RF test mode	<code># echo "rf_test_mode=1" >> /proc/mwlan/adapter0/config</code>
2	Set the radio mode in 5 GHz (1x1 mode)	<code># echo "radio_mode=3" >> /proc/mwlan/adapter0/config</code>
3	Set the band to 5 GHz	<code># echo "band=1" >> /proc/mwlan/adapter0/config</code>
4	Set the bandwidth to 80 MHz	<code># echo "bw=4" >> /proc/mwlan/adapter0/config</code>
5	Set TX power to 10 dBm	<code># echo "tx_power=10 2 0" >> /proc/mwlan/adapter0/config</code>
6	Set the channel to 36	<code># echo "channel=36" >> /proc/mwlan/adapter0/config</code>
7	Enable standalone trigger frame (enable RU index 67 and data rate MCS0)	<code># echo "trigger_frame=1 2 1 2 5484 0 1000 0 0 2 1 0 0 0 1 0 1 0 65535 0 511 5 0 67 1 0 0 0 90 0 0 0 0" >> /proc/mwlan/adapter0/config</code>
8	Start TX_frame Refer to Section 2.11 .	<code># echo "tx_frame=1 0x2100 0xabababab 0x256 0 20 0 0 0 0 0 0 0 -1 -1 -1 -1 -1 -1 -1 -1 05:43:3f:c4:51" >> /proc/mwlan/adapter0/config</code>

2.13 Data rates

[Table 16](#) shows 802.11n/a/g/b data rate IDs and data rates.

Table 16. 802.11n/a/g/b data rate ID

Data rate ID (in hex)	Data rate	Data rate ID (in hex)	Data rate
0x0	1 Mbps	0xe	HT_MCS 0
0x1	2 Mbps	0xf	HT_MCS 1
0x2	5.5 Mbps	0x10	HT_MCS 2
0x3	11 Mbps	0x11	HT_MCS 3
0x4	Reserved	0x12	HT_MCS 4
0x5	6 Mbps	0x13	HT_MCS 5
0x6	9 Mbps	0x14	HT_MCS 6
0x7	12 Mbps	0x15	HT_MCS 7
0x8	18 Mbps	0x16	HT_MCS 8
0x9	24 Mbps	0x17	HT_MCS 9
0xa	36 Mbps	0x18	HT_MCS 10
0xb	48 Mbps	0x19	HT_MCS 11
0xc	54 Mbps	0x1a	HT_MCS 12
0xd	Reserved	0x1b	HT_MCS 13
		0x1c	HT_MCS 14
		0x1d	HT_MCS 15
		0x2e	HT_MCS 32

[Table 17](#) shows 802.11ac data rate IDs and data rates.

Table 17. 802.11ac data rate ID

Data rate ID (in hex)	Data rate
0x100	VHT_SS1_MCS0
0x101	VHT_SS1_MCS1
0x102	VHT_SS1_MCS2
0x103	VHT_SS1_MCS3
0x104	VHT_SS1_MCS4
0x105	VHT_SS1_MCS5
0x106	VHT_SS1_MCS6
0x107	VHT_SS1_MCS7
0x108	VHT_SS1_MCS8
0x109	VHT_SS1_MCS9
0x110	VHT_SS2_MCS0
0x111	VHT_SS2_MCS1
0x112	VHT_SS2_MCS2
0x113	VHT_SS2_MCS3
0x114	VHT_SS2_MCS4
0x115	VHT_SS2_MCS5
0x116	VHT_SS2_MCS6
0x117	VHT_SS2_MCS7
0x118	VHT_SS2_MCS8
0x119	VHT_SS2_MCS9

[Table 18](#) shows 802.11ac/802.11ax data rate IDs and data rates.

Table 18. 802.11ac/802.11ax data rate ID

Rate number format : (XYRR) X : 1 - 11ac VHT MCS rates, 2 - 11ax HE MCS rates Y: Number of streams. 1 - SS1, 2 - SS2 RR : MCS rate number	
Data rate ID XYRR	Data rate
802.11ac VHT MCS rates^[1]	
0x1100	VHT_SS1_MCS0
0x1101	VHT_SS1_MCS1
0x1102	VHT_SS1_MCS2
0x1103	VHT_SS1_MCS3
0x1104	VHT_SS1_MCS4
0x1105	VHT_SS1_MCS5
0x1106	VHT_SS1_MCS6
0x1107	VHT_SS1_MCS7
0x1108	VHT_SS1_MCS8
0x1109	VHT_SS1_MCS9
0x1200	VHT_SS2_MCS0
0x1201	VHT_SS2_MCS1
0x1202	VHT_SS2_MCS2
0x1203	VHT_SS2_MCS3
0x1204	VHT_SS2_MCS4
0x1205	VHT_SS2_MCS5
0x1206	VHT_SS2_MCS6
0x1207	VHT_SS2_MCS7
0x1208	VHT_SS2_MCS8
0x1209	VHT_SS2_MCS9
802.11ax HE MCS rates	
0x2100	HE_SS1_MCS0
0x2101	HE_SS1_MCS1
0x2102	HE_SS1_MCS2
0x2103	HE_SS1_MCS3
0x2104	HE_SS1_MCS4
0x2105	HE_SS1_MCS5
0x2106	HE_SS1_MCS6
0x2107	HE_SS1_MCS7
0x2108	HE_SS1_MCS8

Table 18. 802.11ac/802.11ax data rate ID ...continued

Rate number format : (XYRR) X : 1 - 11ac VHT MCS rates, 2 - 11ax HE MCS rates Y: Number of streams. 1 - SS1, 2 - SS2 RR : MCS rate number	
Data rate ID XYRR	Data rate
0x2109	HE_SS1_MCS9
0x210a	HE_SS1_MCS10
0x210b	HE_SS1_MCS11
0x2200	HE_SS2_MCS0
0x2201	HE_SS2_MCS1
0x2202	HE_SS2_MCS2
0x2203	HE_SS2_MCS3
0x2204	HE_SS2_MCS4
0x2205	HE_SS2_MCS5
0x2206	HE_SS2_MCS6
0x2207	HE_SS2_MCS7
0x2208	HE_SS2_MCS8
0x2209	HE_SS2_MCS10
0x220a	HE_SS2_MCS11

[1] Not all VHT rates are available for all the bandwidths and Tx antenna configurations. The error code 0xE means that the rate and hardware combination is not supported.

2.14 Wi-Fi channels

Table 19. Wi-Fi channel list

Channel number	Frequency	Channel number	Frequency	Channel number	Frequency
2.4 GHz channel					
1	2412	2	2417	3	2422
4	2427	5	2432	6	2437
7	2442	8	2447	9	2452
10	2457	11	2462	12	2467
13	2472	—	—	—	—
5 GHz channel					
36	5180	38	5190	40	5200
42	5210	44	5220	46	5320
48	5420	52	5260	54	5270
56	5280	58	5290	60	5300
62	5310	64	5320	100	5500
102	5510	104	5520	106	5530
108	5540	110	5550	112	5560
116	5580	118	5590	120	5600
122	5610	124	5620	126	5630
128	5640	132	5660	134	5670
136	5680	138	5690	140	5700
142	5710	144	5720	149	5745
151	5775	153	5765	155	5775
157	5785	159	5795	161	5805
165	5825	167	5835	169	5845
171	5855	173	5865	175	5875
177	5885	—	—	—	—

2.15 RF test mode command sequence examples

2.15.1 2.4 GHz TX command sequence using TX_continuous

TX on radio 1 configured for 2.4 GHz, RF channel 6, 20 MHz bandwidth, 8 dBm target power with MCS modulation, HE SS1 MCS8 rate, and 1x1 mode (path A).

Table 20. 2.4 GHz TX command sequence using TX_continuous

Step	Operation	Command
1	Enable the RF test mode	<code>echo "rf_test_mode=1" >> /proc/mwlan/adapter1/config</code>
2	Set radio mode 1 in 2.4 GHz band with 1x1 mode (path A):	<code>echo "radio_mode=0 11" >> /proc/mwlan/adapter1/config</code>
3	Set TX antenna mode (path A)	<code>echo "tx_antenna=1" >> /proc/mwlan/adapter1/config</code>
4	Set 20 MHz bandwidth	<code>echo "bw=0" >> /proc/mwlan/adapter1/config</code>
5	Set RF channel 6	<code>echo "channel=6" >> /proc/mwlan/adapter1/config</code>
6	Set TX power to 8 dBm, MCS modulation and TX signal path A	<code>echo "tx_power=8 2 0" >> /proc/mwlan/adapter1/config</code>
7	Start TX with continuous wave mode at HE SS1 MCS8 rate with a 0xAAA pattern	<code>echo "tx_continuous=1 1 0xAAA 0 3 0x2108" >> /proc/mwlan/adapter1/config</code>
8	Stop TX continuous wave	<code>echo "tx_continuous=0 1 0xAAA 0 3 0x2108" >> /proc/mwlan/adapter1/config</code>

2.15.2 5 GHz RX command sequence

RX on radio 0 configured for 5 GHz, RF channel 36, 40 MHz bandwidth, and 2x2 path A+B.

Table 21. 5 GHz RX command sequence

Step	Operation	Command
1	Enable the RF test mode	<code>echo "rf_test_mode=1" >> /proc/mwlan/adapter0/config</code>
2	Set radio mode 0 in 5 GHz band with 2x2 mode (Path A+B):	<code>echo "radio_mode=1 0" >> /proc/mwlan/adapter0/config</code>
3	Set 5 GHz band	<code>echo "band=1" >> /proc/mwlan/adapter0/config</code>
4	Set 40 MHz bandwidth	<code>echo "bw=1" >> /proc/mwlan/adapter0/config</code>
5	Set RX antenna mode (both path)	<code>echo "rx_antenna=3" >> /proc/mwlan/adapter0/config</code>
6	Set channel 36	<code>echo "channel=36" >> /proc/mwlan/adapter0/config</code>
7	Reset the packet error rate	<code>echo "get_and_reset_per" >> /proc/mwlan/adapter0/config</code>
8	Send a number of packets to the DUT	
9	Get and reset the packet error rate	<code>echo "get_and_reset_per" >> /proc/mwlan/adapter0/config</code>
10	Verify the packet-related parameters	<code>cat /proc/mwlan/adapter0/config</code> Output: <pre>... total rx pkt count=1500 rx multicast/broadcast pkt count=1500 rx fcs error pkt count=0 ...</pre>

2.16 RF test mode command sequence examples for 88W9098

2.16.1 5 GHz TX command sequence using tx_frame

TX on radio 0 configured for 5 GHz RF channel 44, 20 MHz bandwidth, 10 dBm target power with MCS modulation, HE SS1 MCS11 rate, and 1x1 mode (path A).

Table 22. 5 GHz TX command sequence using tx_frame

Step	Operation	Command
1	Enable the RF test mode	<code>echo "rf_test_mode=1" >> /proc/mwlan/adapter0/config</code>
2	Set radio mode 0 in 5 GHz band with 1x1 mode (path A)	<code>echo "radio_mode=3 0" >> /proc/mwlan/adapter0/config</code>
3	Set TX antenna mode (path A)	<code>echo "tx_antenna=1" >> /proc/mwlan/adapter0/config</code>
4	Set 20 MHz bandwidth	<code>echo "bw=0" >> /proc/mwlan/adapter0/config</code>
5	Set RF channel 44	<code>echo "channel=44" >> /proc/mwlan/adapter0/config</code>
6	Set TX power to 10 dBm, MCS modulation and TX signal path A	<code>echo "tx_power=10 2 0" >> /proc/mwlan/adapter0/config</code>
7	Start TX at HE SS1 MCS11 rate	<code>echo "tx_frame=1 0x210b 0xAAA 0x100 1 20 0 0 0 1 0 0 0 -1 -1 -1 -1 -1 -1 -1 -1 05:43:3f:c4:51" >> /proc/mwlan/adapter0/config</code>
8	Stop TX	<code>echo "tx_frame=0" >> /proc/mwlan/adapter0/config</code>

2.16.2 5 GHz TX command sequence using tx_frame for HE-ER SU

TX on radio 0 configured for 5 GHz RF channel 44, 20 MHz bandwidth, 10 dBm target power with MCS modulation, HE SS1 MCS1 rate, short preamble, and 1x1 mode (path A) for HE-ER SU.

Table 23. 5 GHz TX command sequence using tx_frame for HE-ER SU

Step	Operation	Command
1	Enable the RF test mode	<code>echo "rf_test_mode=1" >> /proc/mwlan/adapter0/config</code>
2	Set radio mode 0 in 5 GHz band with 1x1 mode (path A)	<code>echo "radio_mode=3 0 " >> /proc/mwlan/adapter0/config</code>
3	Set TX antenna mode (path A)	<code>echo "tx_antenna=1" >> /proc/mwlan/adapter0/config</code>
4	Set 20 MHz bandwidth	<code>echo "bw=0" >> /proc/mwlan/adapter0/config</code>
5	Set RF channel 44	<code>echo "channel=44" >> /proc/mwlan/adapter0/config</code>
6	Set TX power to 10 dBm, MCS modulation and TX signal path A	<code>echo "tx_power=10 2 0" >> /proc/mwlan/adapter0/config</code>
7	Start TX at HE SS1 MCS1 rate and short preamble for HE-ER SU ^[1]	<code>echo "tx_frame=1 0x2101 0xAAA 0x100 1 20 1 0 0 0 0 0 0 -1 -1 -1 -1 -1 -1 -1 -1 05:43:3f:c4:51" >> /proc/mwlan/adapter0/config</code>
8	Stop TX	<code>echo "tx_frame=0" >> /proc/mwlan/adapter0/config</code>

- [1]
- 242 tones RU: MCS supported are MCS0-2. Set signalBw to 0 and MCS to 0, 1 or 2.
 - 106 tone RU: MCS supported is MCS0. Set signalBw to 1 and MCS to 0
 - Set short preamble to 0x1 in tx_frame command for HE-ER SU in RF_TEST_MODE
 - preambleType: Use the default value (-1) unless required.
 - For legacy 802.11b: preamble type
 - 0 = long
 - 1 = short
 - For legacy 802.11g: not valid
 - For 802.11n: GreenField PPDU indicator
 - 0 = HT-mix
 - 1 = HT-GF
 - For 802.11ac: not valid
 - For 802.11ax: PPDU type
 - 0 = HE-SU
 - 1 = HE-EXT-SU
 - 2 = HE-MU
 - 3 = HE-Trigger-based

2.16.3 2.4 GHz TX command sequence using tx_frame

TX on radio 1 configured for 2.4 GHz RF channel 11, 40 MHz bandwidth, 9 dBm target power with MCS modulation, HE SS1 MCS4 rate, and 1x1 mode (path B).

Table 24. 2.4 GHz TX command sequence using tx_frame

Step	Operation	Command
1	Enable the RF test mode	<code>echo "rf_test_mode=1" >> /proc/mwlan/adapter1/config</code>
2	Set radio mode 1 in 2.4 GHz band with 1x1 mode (path B):	<code>echo "radio_mode=0 14" >> /proc/mwlan/adapter1/config</code>
3	Set TX antenna mode (path B)	<code>echo "tx_antenna=2" >> /proc/mwlan/adapter1/config</code>
4	Set 40 MHz bandwidth	<code>echo "bw=1" >> /proc/mwlan/adapter1/config</code>
5	Set RF channel 11	<code>echo "channel=11" >> /proc/mwlan/adapter1/config</code>
6	Set TX power to 9 dBm, MCS modulation and TX signal path B	<code>echo "tx_power=9 2 1" >> /proc/mwlan/adapter1/config</code>
7	Start TX at HE SS1 MCS4 rate	<code>echo "tx_frame=1 0x2104 0xAAA 0x100 1 20 0 0 0 0 0 0 0 -1 -1 -1 -1 -1 -1 -1 -1 05:43:3f:c4:51" >> /proc/mwlan/adapter1/config</code>
8	Stop TX	<code>echo "tx_frame=0" >> /proc/mwlan/adapter1/config</code>

2.16.4 5 GHz TX command sequence using tx_continuous

TX on radio 0 configured for 5 GHz RF channel 36, 40 MHz bandwidth, 11 dBm target power with MCS modulation, HE SS1 MCS9 rate, and 2x2 mode (both paths).

Table 25. 5 GHz TX command sequence using tx_continuous

Step	Operation	Command
1	Enable the RF test mode	<code>echo "rf_test_mode=1" >> /proc/mwlan/adapter0/config</code>
2	Set radio mode 0 in 5 GHz band with 2x2 mode (Path A+B)	<code>echo "radio_mode=1 0" >> /proc/mwlan/adapter0/config</code>
3	Set TX antenna mode (both path)	<code>echo "tx_antenna=3" >> /proc/mwlan/adapter0/config</code>
4	Set 40 MHz bandwidth	<code>echo "bw=1" >> /proc/mwlan/adapter0/config</code>
5	Set RF channel 36	<code>echo "channel=36" >> /proc/mwlan/adapter0/config</code>
6	Set TX power to 11 dBm, MCS modulation and TX signal path A + path B	<code>echo "tx_power=11 2 2" >> /proc/mwlan/adapter0/config</code>
7	Start TX at HE SS1 MCS9 rate	<code>echo "tx_continuous=1 0 0xAAA 0 3 0x2109" >> /proc/mwlan/adapter0/config</code>
8	Start TX continuous wave mode at HE SS1 MCS9 rate	<code>echo "tx_continuous=1 1 0xAAA 0 3 0x2109" >> /proc/mwlan/adapter0/config</code>
9	Stop TX continuous wave mode	<code>echo "tx_continuous=0 1 0xAAA 0 3 0x2109" >> /proc/mwlan/adapter0/config</code>

Note: For TX, refer to either step 7 or step 8 based on whether the continuous wave mode is enabled or disabled.

2.16.5 2.4 GHz TX command sequence using tx_continuous

TX on radio 1 configured for 2.4 GHz RF channel 6, 20 MHz bandwidth, 8 dBm target power with MCS modulation, HE SS1 MCS8 rate, and 1x1 mode (path A).

Table 26. 2.4 GHz TX command sequence using tx_continuous

Step	Operation	Command
1	Enable the RF test mode	<code>echo "rf_test_mode=1" >> /proc/mwlan/adapter1/config</code>
2	Set radio mode 1 in 2.4 GHz band with 1x1 mode (path A):	<code>echo "radio_mode=0 11" >> /proc/mwlan/adapter1/config</code>
3	Set TX antenna mode (path A)	<code>echo "tx_antenna=1" >> /proc/mwlan/adapter1/config</code>
4	Set 20 MHz bandwidth	<code>echo "bw=0" >> /proc/mwlan/adapter1/config</code>
5	Set RF channel 6	<code>echo "channel=6" >> /proc/mwlan/adapter1/config</code>
6	Set TX power to 8 dBm, MCS modulation and TX signal path A	<code>echo "tx_power=8 2 0" >> /proc/mwlan/adapter1/config</code>
7	Start TX at HE SS1 MCS8 rate	<code>echo "tx_continuous=1 0 0xAAA 0 3 0x2108" >> /proc/mwlan/adapter1/config</code>
8	Start TX with continuous wave mode at HE SS1 MCS8 rate	<code>echo "tx_continuous=1 1 0xAAA 0 3 0x2108" >> /proc/mwlan/adapter1/config</code>
9	Stop TX continuous wave mode	<code>echo "tx_continuous=0 1 0xAAA 0 3 0x2108" >> /proc/mwlan/adapter1/config</code>

Note: For TX, refer to either step 7 or step 8 based on whether continuous wave mode is enabled or disabled.

2.16.6 5 GHz RX command sequence

RX on radio 0 configured for 5 GHz RF channel 36, 40 MHz bandwidth, and 2x2 path A+B.

Table 27. 5 GHz RX command sequence

Step	Operation	Command
1	Enable the RF test mode	<code>echo "rf_test_mode=1" >> /proc/mwlan/adapter0/config</code>
2	Set radio mode 0 in 5 GHz band with 2x2 mode (Path A+B):	<code>echo "radio_mode=1 0" >> /proc/mwlan/adapter0/config</code>
3	Set 5 GHz band	<code>echo "band=1" >> /proc/mwlan/adapter0/config</code>
4	Set 40 MHz bandwidth	<code>echo "bw=1" >> /proc/mwlan/adapter0/config</code>
5	Set RX antenna mode (both path)	<code>echo "rx_antenna=3" >> /proc/mwlan/adapter0/config</code>
6	Set channel 36	<code>echo "channel=36" >> /proc/mwlan/adapter0/config</code>
7	Reset the packet error rate	<code>echo "get_and_reset_per" >> /proc/mwlan/adapter0/config</code>
8	Inject a definite number of packets at a specific power level	
9	Get and reset the packet error rate	<code>echo "get_and_reset_per" >> /proc/mwlan/adapter0/config</code>
10	Verify the packet-related parameters	<code>cat /proc/mwlan/adapter0/config</code>

2.16.7 2.4 GHz RX command sequence

RX on radio 1 configured for 2.4 GHz RF channel 6, 20 MHz bandwidth, and 1x1 path A.

Table 28. 2.4 GHz RF command sequence

Step	Operation	Command
1	Enable the RF test mode	<code>echo "rf_test_mode=1" >> /proc/mwlan/adapter1/config</code>
2	Set radio mode 1 in 2.4 GHz band with 1x1 mode (Path A):	<code>echo "radio_mode=0 11" >> /proc/mwlan/adapter1/config</code>
3	Set 2.4 GHz band	<code>echo "band=0" >> /proc/mwlan/adapter1/config</code>
4	Set 20 MHz bandwidth	<code>echo "bw=0" >> /proc/mwlan/adapter1/config</code>
5	Set RX antenna mode (path A)	<code>echo "rx_antenna=1" >> /proc/mwlan/adapter1/config</code>
6	Set channel 6	<code>echo "channel=6" >> /proc/mwlan/adapter1/config</code>
7	Reset the packet error rate	<code>echo "get_and_reset_per" >> /proc/mwlan/adapter1/config</code>
8	Inject a definite number of packets at a specific power level	
9	Get and reset the packet error rate	<code>echo "get_and_reset_per" >> /proc/mwlan/adapter1/config</code>
10	Verify the packet-related parameters	<code>cat /proc/mwlan/adapter1/config</code>

3 Bluetooth RF test mode

This section describes the commands to use RF test mode for Bluetooth Classic and Bluetooth Low Energy on the i.MX 8M Quad EVK with Linux. The commands apply to any Linux-based host.

Bluetooth RF test mode parameters use HCI commands following Bluetooth Core Specification v5.3 ([1]) and vendor-specific commands. For more information on vendor-specific commands, refer to the Bluetooth software user manual of your device.

The command parameters in this section are entered in hexadecimal little endian format.

In the command examples, `hci0` refers to the Bluetooth device.

Command to check the name of your device:

```
hciconfig -a
```

Note: In this section, the bolded hex value 00 in the example command outputs means that the command was set successfully.

3.1 List of commands for Bluetooth RF test mode

Table 29 lists the commands for Bluetooth RF test mode.

Table 29. List of commands for Wi-Fi RF test mode

Command
Bluetooth Classic
Enable test mode for qualification
Set the receive test parameters
End the receive test
Set the transmit test parameters
End the transmit command
Update the parameter settings for RF TX test
Bluetooth LE
Test Bluetooth LE receiver
End the receive test and get the packet count
Set Bluetooth LE TX power
Test Bluetooth LE transmitter
End Bluetooth LE test

3.2 Bluetooth Classic

This section describes how to use RF test mode commands for Bluetooth Classic.

3.2.1 Enable test mode for qualification

Sequence of commands to enable test mode for qualification.

- Perform an HCI reset.

```
hcitool -i hci0 cmd 0x03 0x0003
```

Command output example:

```
< HCI Command: ogf 0x03, ocf 0x0003, plen 0  
> HCI Event: 0x0e plen 4  
01 03 0C 00
```

- Enable BR/EDR scan.

```
hcitool -i hci0 cmd 0x03 0x001a 0x3
```

Command output example:

```
< HCI Command: ogf 0x03, ocf 0x001a, plen 1  
03  
> HCI Event: 0x0e plen 4  
01 1A 0C 00
```

- Set event filter.

```
hcitool -i hci0 cmd 0x03 0x0005 0x02 0x00 0x02
```

Command output example:

```
< HCI Command: ogf 0x03, ocf 0x0005, plen 3  
02 00 02  
> HCI Event: 0x0e plen 4  
01 05 0C 00
```

- Enable test mode for qualification

```
hcitool -i hci0 cmd 0x06 0x0003
```

Command output example:

```
< HCI Command: ogf 0x06, ocf 0x0003, plen 0  
> HCI Event: 0x0e plen 4  
01 03 18 00
```

Note: The HCI reset command is used to resume normal Bluetooth operation after enabling test mode.

3.2.2 Set the receive test parameters

Command to set the receive test parameters:

```
hcitool -i hci0 cmd 0x3F 0x0018 <TestScenario> <TXFrequency> <RXFrequency>
<TestPacketType> <Expected Number of Packets> <Length of Test Data> <TX AM Address> <BD
Address> <Report error packets>
```

where:

Table 30. Command parameters

Parameter	Length (bytes)	Definition
OGF	1	0x3F
OCF	2	0x0018
TestScenario	1	Test scenario • 0x01 = receiver test, 0–pattern • 0x02 = receiver test, 1–pattern • 0x03 = receiver test, 1010–pattern • 0x04 = receiver test, PRBS–pattern • 0x09 = receiver test, 1111 0000–pattern • 0xFF = abort test mode
TXFrequency	1	Transmit Frequency = (2402+k) MHz, where k is the value of TXChannel k range: 0x00 to 0x4F
RXFrequency	1	Receive Frequency = (2402+k) MHz, where k is the value of RXChannel k range: 0x00 to 0x4F
TestPacketType	1	Test Packet Type • 0x03 = DM1 • 0x04 = DH1 • 0x0A = DM3 • 0x0B = DH3 • 0x0E = DM5 • 0x0F = DH5 • 0x14 = 2-DH1 • 0x18 = 3-DH1 • 0x1A = 2-DH3 • 0x1B = 3-DH3 • 0x1E = 2-DH5 • 0x1F = 3-DH5
Expected Number of Packets	4	The expected number of RX packets
Length of Test Data	2	The length of the test data Note: This value should not be bigger than the maximum size of the specified test packet type
TX AM Address	1	Default = 0x01
Transmitter BD Address	6	Transmitter's BD address
Report error packets	1	Report Error Packets • 0x00 = none (default) • 0x01 to 0xFE = number of packets to report

Example of command to set the receive test with the following parameters:

- RX Frequency: 2402 MHz
- Test Scenario: 0-pattern
- Test Packet Type: DH5
- Expected Number of Packets: 1500
- Transmitter BD Address: 00:26:1F:EC:F6:4E

```
hcitool -i hci0 cmd 0x3F 0x0018 0x01 0x00 0x00 0x0F 0xDC 0x05 0x00 0x00 0x25 0x00 0x01  
0x4E 0xF6 0xEC 0x1F 0x26 0x00
```

Command output example:

```
< HCI Command: ogf 0x3f, ocf 0x0018, plen 18  
01 00 00 0F DC 05 00 00 25 00 01 4E F6 EC 1F 26 00 00  
> HCI Event: 0xfe plen 4  
01 18 FC 00
```

3.2.3 End the receive test

Command to end the receive test:

```
hcitool -i hci0 cmd 0x3F 0x0018 0xFF
```

Command output example:

```
< HCI Command: ogf 0x3f, ocf 0x0018, plen 1  
FF  
> HCI Event: 0xff plen 70  
01 00 DC 05 00 00 4C 04 00 00 90 01 00 00 90 01 00 00 90 01  
00 00 00 00 00 00 00 00 00 00 90 01 00 00 00 00 00 00 4C 04  
00 00 64 00 00 00 60 C6 06 00 70 DA 05 00 30 00 00 00 D0 39  
00 00 90 E2 00 00 D4 FF FF FF
```

Note: The bolded hex value (0x0190) indicates 400 packets were received by the DUT.

3.2.4 Set the transmit test parameters

Command to set the transmit test parameters.

```
hcitool -i hci0 cmd 0x3F 0x0019 0x80 0x80 0x80 0x80 <TestScenario> <HoppingMode>
<TXChannel> <RXChannel> <TXTestInterval> <PacketType> <Length> <Whitening> <Number of
Test Packets> <TX Power>
```

where:

Table 31. Command parameters

Parameter	Length (bytes)	Definition
OGF	1	0x3F
OCF	2	0x0019
RXOnStart	1	Set to 0x80.
SyntOnStart 1	1	
TXOnStart	1	
PhdOffStart	1	
TestScenario	1	Test scenario • 0x01 = PATTERN_00 (data pattern: 0x00) • 0x02 = PATTERN_FF (data pattern: 0xFF) • 0x03 = PATTERN_55 (data pattern: 0x55) • 0x04 = PATTERN_PRBS (data pattern: 0xFE) • 0x09 = PATTERN_0F (data pattern: 0x0F) • 0xFF = exit test
HoppingMode	1	• 0x00 = fix frequency • 0x01 = hopping set
TXChannel	1	Transmit Frequency = (2402+k) MHz, where k is the value of TXChannel k range: 0x00 to 0x4F
RXChannel	1	Receive Frequency = (2402+k) MHz, where k is the value of RXChannel k range: 0x00 to 0x4F
TXTestInterval	1	Poll interval in frames for the link (In units per 1.25 ms)
PacketType	1	Transmit Packet Type • 0x03 = DM1 • 0x04 = DH1 • 0x0A = DM3 • 0x0B = DH3 • 0x0E = DM5 • 0x0F = DH5 • 0x14 = 2-DH1 • 0x18 = 3-DH1 • 0x1A = 2-DH3 • 0x1B = 3-DH3 • 0x1E = 2-DH5 • 0x1F = 3-DH5
Length	2	Length of test data
Whitening	1	• 0x00 = disabled

Table 31. Command parameters...continued

Parameter	Length (bytes)	Definition
		• 0x01 = enabled
Number of Test Packets	4	Number of packets to transmit • 0 = infinite
TX Power	1	Signed value of TX power (dBm) • For IW612: range = -20 dBm to 19 dBm^[1] • For all the other modules: range = -20 dBm to 12 dBm

[1] Depends on Bluetooth class

Example of command to the transmit test with the following parameters:

- TX Frequency: 2403 MHz
- Test Scenario: 0-pattern
- Hopping Mode: Fixed Frequency
- Packet Type: DM1
- TX power: 4 dBm

```
hcitool -i hci0 cmd 0x3F 0x0019 0x80 0x80 0x80 0x80 0x01 0x00 0x01 0x01 0x0D 0x03 0x0F
0x00 0x00 0x00 0x00 0x00 0x00 0x04
```

Command output example:

```
< HCI Command: ogf 0x3f, ocf 0x0019, plen 18
80 80 80 80 01 00 01 01 0D 03 0F 00 00 00 00 00 00 04
> HCI Event: 0x0e plen 4 01 19 FC 00
```

3.2.5 End the transmit command

Issue the command to end the transmit test:

```
hcitool -i hci0 cmd 0x3F 0x0019 0x80 0x80 0x80 0x80 0xFF
```

Command output example:

```
< HCI Command: ogf 0x3f, ocf 0x0019, plen 18
80 80 80 80 FF 00 01 01 0D 03 0F 00 00 00 00 00 00 04
> HCI Event: 0xff plen 6
19 01 2F 0F 00 00
```

3.2.6 Update the parameter settings for RF TX test

[Table 32](#) lists the parameters settings when testing Bluetooth TX hopping mode dwell time using different Bluetooth ACL link packet types.

Table 32. Parameter settings to test Bluetooth TX hopping mode dwell time

Packet type	TX test interval (units, 1.25ms)	Data packet type	Maximum payload size (byte)
DH1	0x01	0x04	0x001B
DH3	0x02	0x0B	0x00B7
DH5	0x03	0x0F	0x0153
2DH1	0x01	0x14	0x0036
2DH3	0x02	0x1A	0x016F
2DH5	0x03	0x1E	0x02A7
3DH1	0x01	0x18	0x0053
3DH3	0x02	0x1B	0x0228
3DH5	0x03	0x1F	0x03FD

Note: In the transmit test command, pass the arguments in little endian format. For example, pass the value 0x001B as 0x1B 0x00.

3.3 Bluetooth Low Energy (LE)

This section describes how to use RF test mode commands for Bluetooth LE.

3.3.1 Test Bluetooth LE receiver

To start a test where the DUT receives test reference packets at a fixed interval, use the `LE Receiver Test[V2]`

command. For more details on the command, refer to *section 7.8.28* of [\[1\]](#).

```
hcitool -i hci0 cmd 0x08 0x0033 <RX Channel> <PHY> <Modulation Index>
```

Where:

Table 33. Command parameters

Parameter	Length (bytes)	Description
OGF	1	OGF for the LE Controller commands set to 0x08
OCF	1	OCF to write the Bluetooth LE receiver test set to 0x0033
RX Channel	1	RF Channel to be used by the receiver Channel number = (F-2402) / 2 Input range: 0x00 to 0x27
PHY	1	PHY to be used by the receiver 0x01 = Receiver set to use the LE 1M PHY 0x02 = Receiver set to use the LE 2M PHY 0x03 = Receiver set to use the LE Coded PHY
Modulation Index	1	Modulation Index 0x00 = Assume transmitter will have a standard modulation index 0x01 = Assume transmitter will have a stable modulation index

Command example to the receive test with the following parameters:

- RX channel: 2404 MHz
- PHY: LE 2M
- Standard modulation index for the transmitter

```
hcitool -i hci0 cmd 0x08 0x0033 0x01 0x02 0x00
```

Command output example:

```
< HCI Command: ogf 0x08, ocf 0x0033, plen 3
01 02 00
> HCI Event: 0x0e plen 4
01 33 20 00
```

3.3.2 End the receive test and get the packet count

To stop any ongoing test, use the Bluetooth LE Test End command. For more details on the command, refer to section 7.8.30 of [\[1\]](#).

```
hcitool -i hci0 cmd 0x08 0x001F
```

Command output example:

```
< HCI Command: ogf 0x08, ocf 0x001f, plen 0  
> HCI Event: 0x0e plen 6  
01 1F 20 00 20 03
```

Note: The hex value in bold (0x0320) indicates that the DUT received 800 packets.

3.3.3 Set Bluetooth LE TX power

Command to set the Bluetooth LE transmit power level:

```
hcitool -i hci0 cmd 0x3F 0x87 <TX_power> <front-end loss>
```

Where:

Table 34. Command parameters

Parameter	Length (bytes)	Description
ogf	1	OGF for vendor specific command set to 0x3F
ocf	2	OCF to write Bluetooth LE transmit power set to 0x0087
TX_power	1	Transmit power level for Bluetooth LE in dBm. Default value = 0x00 0x04 = 4 dBm Minimum value = 0xE2 (-30 dBm) Maximum value = 0x14 (20 dBm)
front-end loss	1	Front-end (FE) loss 0x00: ignore FE loss. 0x01: consider FE loss.

```
hcitool -i hci0 cmd 0x3F 0x87 0x04 0x00
```

Command output example:

```
< HCI Command: ogf 0x3f, ocf 0x0087, plen 1
04
> HCI Event: 0x0e plen 4
01 87 FC 00
```

3.3.4 Test Bluetooth LE transmitter

To start a test where the DUT generates test reference packets at a fixed interval, use the `LE Transmitter Test[V2]` command. For more details on the command, refer to [section 7.8.29 of \[1\]](#).

```
hcitool -i hci0 cmd 0x08 0x0034 <TX Channel> <Test Data Length> <Packet Payload>
```

Where:

Table 35. Command parameters

Parameter	Length (bytes)	Description
OGF	1	OGF for the LE Controller commands set to 0x08
OCF	1	OCF to write the Bluetooth LE transmit test set to 0x0034
TX Channel	1	Transmit Channel N = (F-2402) / 2 Range: 0x00 to 0x27 Frequency Range: 2402 MHz to 2480 MHz
Test_Data_Length	1	0x00 to 0xFF Length in bytes of payload data in each packet
Packet_Payload	1	Packet payload. Refer Bluetooth Core Spec v5.3 for more details.
PHY	1	PHY to be used by the receiver 0x01 - Transmitter set to use the LE 1M PHY 0x02 - Transmitter set to use the LE 2M PHY 0x03 - Transmitter set to use the LE Coded PHY with S=8 data coding 0x04 - Transmitter set to use the LE Coded PHY with S=2 data coding

Example of command to set the transmit test with the following parameters:

- TX Channel: 2404 MHz
- Test Data Length: 1 Byte
- Packet Payload: PRBS9 sequence '11111111100000111101...'
- PHY: LE 2M

Command output example:

```
< HCI Command: ogf 0x08, ocf 0x0034, plen 4
01 01 00 02
> HCI Event: 0x0e plen 4
01 34 20 00
```

3.3.5 End Bluetooth LE test

To stop any test which is in progress, use the `LE Test End` command. For more details on the command, refer to *section 7.8.30* of [\[1\]](#).

```
hcitool -i hci0 cmd 0x08 0x001F
```

Command output example:

```
< HCI Command: ogf 0x08, ocf 0x001f, plen 0  
> HCI Event: 0x0e plen 6  
01 1F 20 00 00 00
```

3.4 RF test mode command sequence examples

3.4.1 Bluetooth Classic TX test

TX test with DM1 packets on RF channel 0 at 4 dBm.

Table 36. Bluetooth Classic TX command sequence

Step	Operation	Command
1	Perform an HCI reset	<code>hcitool -i hci0 cmd 0x03 0x0003</code>
2	Transmit 4 dBm DM1 packets at 2402 MHz with data pattern 0x00	<code>hcitool -i hci0 cmd 0x3F 0x0019 0x80 0x80 0x80 0x80 0x01 0x00 0x00 0x00 0x0D 0x03 0x0F 0x00 0x00 0x00 0x00 0x00 0x00 0x04</code>
3	End transmit	<code>hcitool -i hci0 cmd 0x3F 0x0019 0x80 0x80 0x80 0x80 0xFF</code>

3.4.2 Bluetooth Classic RX Test

RX test with 3-DH5 packets on RF channel 0

Table 37. Bluetooth Classic RX command sequence

Step	Operation	Command
1	Perform an HCI reset	<code>hcitool -i hci0 cmd 0x03 0x0003</code>
2	Enable receive at 2402 MHz for 3-DH5 packets from TX device 00:26:1F:EC:F6:4E	<code>hcitool -i hci0 cmd 0x3F 0x0018 0x01 0x00 0x00 0x00 0x0F 0xDC 0x05 0x00 0x00 0x25 0x00 0x01 0x4E 0xF6 0xEC 0x1F 0x26 0x00 0x00</code>
3	Transmit packets to the DUT with an RF tester	
4	End receive test and get packet count	<code>hcitool -i hci0 cmd 0x3F 0x0018 0xFF</code> Output: < HCI Command: ogf 0x3f, ocf 0x0018, plen 1 FF > HCI Event: 0xff plen 70 01 00 DC 05 00 00 4C 04 00 00 90 01 00 00 90 01 00 00 90 01 00 00 00 00 00 00 00 00 00 00 00 00 90 01 00 00 00 00 4C 04 00 00 64 00 00 00 60 C6 06 00 70 DA 05 00 30 00 00 00 D0 39 00 00 90 E2 00 00 D4 FF FF FF Note: The bolded hex value (0x0190) indicates 400 packets were received by the DUT.

3.4.3 Bluetooth LE TX test

TX test with 2M LE packets on RF channel 0 at 4 dBm.

Table 38. Bluetooth LE TX command sequence

Step	Operation	Command
1	Perform an HCI reset	<code>hcitool -i hci0 cmd 0x03 0x0003</code>
2	Set TX power to 4 dBm	<code>hcitool -i hci0 cmd 0x3F 0x87 0x04</code>
3	Transmit 4 dBm 2M LE packets at 2402 MHz	<code>hcitool -i hci0 cmd 0x08 0x0034 0x00 0x01 0x00 0x02</code>
4	End transmit	<code>hcitool -i hci0 cmd 0x08 0x001F</code>

3.4.4 Bluetooth LE RX test

RX test with 1M LE packets on RF channel 0.

Table 39. Bluetooth LE RX command sequence

Step	Operation	Command
1	Perform an HCI reset	<code>hcitool -i hci0 cmd 0x03 0x0003</code>
2	Enable RX at 2402MHz LE 1M	<code>hcitool -i hci0 cmd 0x08 0x0033 0x00 0x01 0x00</code>
3	Transmit packets to the DUT with an RF tester	
4	End receive test and get packet count	<code>hcitool -i hci0 cmd 0x08 0x001F</code> Output: <pre>< HCI Command: ogf 0x08, ocf 0x001f, plen 0 > HCI Event: 0x0e plen 6 01 1F 20 00 20 03</pre> Note: The bolded hex value (0x0320) indicates 800 packets were received by the DUT.

4 RF test mode for 802.15.4

This section describes the commands to use RF test mode for IEEE 802.15.4 on the i.MX 8M Quad EVK with Linux. The commands apply to any Linux-based host.

Note: The commands use the *ot-ctl* utility, which needs to be cross-compiled with the *ot-daemon* tool. For more information on building *ot-ctl* utility, refer to [2].

4.1 List of commands for 802.15.4 RF test mode

Table 40 lists the commands available for RF test mode of Wi-Fi.

Table 40. List of commands for Wi-Fi RF test mode

Command
Enable or disable 802.15.4 RF test mode
Reset 802.15.4 radio
Get the RF channel
Set the RF channel
Get TX power level value
Set TX power level value
Continuous TX
Get TX payload size
Set TX packet payload size
802.15.4 TX burst packet
Set 802.15.4 TX duty cycle
Set 802.15.4 PHY TX test packet information
Start 802.15.4 RX test
Get 802.15.4 RX test result

4.2 Enable or disable 802.15.4 RF test mode

Command to enable 802.15.4 RF test mode:

```
ot-ctl mfgcmd 1
```

Return data: Done

Command to disable 802.15.4 RF test mode:

```
ot-ctl mfgcmd 0
```

Return data: Done

4.3 Reset 802.15.4 radio

Command to reset 802.15.4 RF block:

```
ot-ctl mfgcmd 80 0
```

Return data: Done

4.4 Get the RF channel

Command to get the RF channel.

```
ot-ctl mfgcmd 11
```

Return data: Currently set channel

4.5 Set the RF channel

Command to set the RF channel.

```
ot-ctl mfgcmd 12 <Channel Number>
```

Where:

Table 41. Command parameters

Parameter	Description
Channel Number	RF Channel Input integer range of 11 (default) to 26

Return data: Done

Example of command to set the 802.15.4 channel to 20

```
ot-ctl mfgcmd 12 20
```

4.6 Get TX power level value

Command to get TX power level value:

```
ot-ctl mfgcmd 15
```

Return data: Target power level value in dBm

4.7 Set TX power level value

Command to set TX power level value:

```
ot-ctl mfgcmd 16 <Pwr>
```

Where:

Table 42. Command parameters

Parameter	Description
Pwr	TX power level in dBm Input integer range of -20 to 15

Example of command to set TX power level to 11 dBm:

```
ot-ctl mfgcmd 16 11
```

Return data: Done

4.8 Continuous TX

Command to transmit a continuous modulated signal:

```
ot-ctl mfgcmd 17 <Enable>
```

Where:

Table 43. Command parameters

Parameter	Description
Enable	Enable the continuous transmission 0 = off 1 = on

Return data: Done

Example of command to set continuous TX mode:

```
ot-ctl mfgcmd 17 1
```

4.9 Get TX payload size

Command to get the TX packet payload size (17-116 bytes).

```
ot-ctl mfgcmd 20
```

Return data: 802.15.4 TX packet payload size in bytes

4.10 Set TX packet payload size

Command to set the TX packet payload size in bytes (17-116 bytes):

```
ot-ctl mfgcmd 21 <Size>
```

Where:

Table 44. Command parameters

Parameter	Description
Size	Packet payload size in bytes Input integer range of 17 - 116

Return data: Done

Example of command to set the TX payload size to 100 bytes:

```
ot-ctl mfgcmd 21 100
```

4.11 802.15.4 TX burst packet

Command to transmit a specific number of packets with a specific packet gap:

```
ot-ctl mfgcmd 33 <count option> <packet gap>
```

Where:

Table 45. Command parameters

Parameter	Description
count option	The number of packet(s) 0 = 1 (default) 1 = 25 2 = 100 3 = 500 4 = 1000 5 = 2000 6 = 5000 7 = 10000
Packet gap	Packet gap in milliseconds Input integer range of 6 – 20 Minimum packet gap for a given payload size 6: For payload size 17 - 44 bytes 7: For payload size 45 - 76 bytes 8: For payload size 77 - 107 bytes 9: For payload size 108 - 116 bytes The maximum gap is 20 ms

Return data: Done

Example of command to transmit 25 packets at 10 ms packet gap:

```
ot-ctl mfgcmd 33 1 10
```

4.12 Set 802.15.4 TX duty cycle

Command to set 802.15.4 transmitter in duty cycle TX mode:

```
ot-ctl mfgcmd 35 <Enable>
```

Where:

Table 46. Command parameters

Parameter	Description
Enable	Enable TX with duty cycle 0 = disable (default) 1 = enables

Return data: Done

Example of command to enable transmit with duty cycle:

```
ot-ctl mfgcmd 35 1
```

4.13 Set 802.15.4 PHY TX test packet information

Command to set 802.15.4 PHY transmitter test packet information:

```
ot-ctl mfgcmd 59 <Seq Number> <PAN ID> <Destination ID> <Source ID>
```

Where:

Table 47. Command parameters

Parameter	Description
Seq Number	Sequence number Set to 1.
PAN ID	Personal Area Network (PAN) identifier Valid input range: 0x0000 to 0xFFFF Note: The transmitting device and the receiving device must share the same PAN ID.
Destination ID	Destination identifier of the receiving device Valid input range: 0x0000 to 0xFFFF
Source ID	Source identifier of the transmitting device Valid input range: 0x0000 to 0xFFFF

Return data: Done

Example of command to set the PHY TX test packet information:

```
ot-ctl mfgcmd 59 1 0x1234 0x2354 0x3456
```

4.14 Start 802.15.4 RX test

Command to start 802.15.4 RX test:

```
ot-ctl mfgcmd 32
```

Return data: Done

4.15 Get 802.15.4 RX test result

Command the extended RX test result report for 802.15.4 radio.

```
ot-ctl mfgcmd 31
```

Return data: Extended RX test result report for 802.15.4.

4.16 Command sequence examples to test 802.15.4 radio

This section provides example of commands for 802.15.4 transmit and receive RF performance tests.

4.16.1 Command sequence to test 802.15.4 radio transmit duty cycle mode

Table 48. 802.15.4 radio transmit duty cycle mode command sequence

Step	Operation	Command
1	Enable the RF test mode	ot-ctl mfgcmd 1
2	Set the RF channel to 20 (2450 MHz)	ot-ctl mfgcmd 12 20
3	Set the power to 4 dBm	ot-ctl mfgcmd 16 4
4	Enable TX in duty cycle mode	ot-ctl mfgcmd 35 1
5	Stop TX	ot-ctl mfgcmd 35 0

4.16.2 Command sequence to test 802.15.4 radio in receive mode

Table 49. 802.15.4 radio receive mode command sequence

Step	Operation	Command
1	Enable 802.15.4 RF test mode	ot-ctl mfgcmd 1
2	Set the RF channel to 11	ot-ctl mfgcmd 12 11
3	Get the channel setting	ot-ctl mfgcmd 11
4	Set the PAN identifier and the destination identifier	ot-ctl mfgcmd 59 1 0xface 0xabcd 0xef12
3	Start RX	ot-ctl mfgcmd 32
4	Transmit packets to the DUT with an RF tester	
5	Return the extended RX result report	ot-ctl mfgcmd 31 Output: status: 0 rx_pkt_count : 500 total_pkt_count : 500 rssi : -53 lqi : 118

5 Abbreviations

Table 50. Abbreviations

Abbreviation	Definition
BR	basic rate (Bluetooth terminology)
BT	Bluetooth
CS	carrier suppression
DH	data high rate (Bluetooth terminology)
DM1	data medium 1 (Bluetooth terminology)
DUT	device under test
EDR	enhanced data rate (Bluetooth terminology)
FW	firmware
HCI	Host command interface
LE	low energy (Bluetooth terminology)
PAN	personal area network
RF	radio frequency
RX	receive
TX	transmit

6 References

- [1] Bluetooth Core Specification v5.3 ([link](#))
- [2] UM11483 – Getting Started with NXP-based Wireless Modules on i.MX 8M Quad EVK Running Linux OS ([link](#))

7 Note about the source code in the document

The example code shown in this document has the following copyright and BSD-3-Clause license:

Copyright 2024-2025 NXP Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials must be provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

8 Revision history

Table 51. Revision history

Document ID	Release date	Description
AN14114 v.5.0	7 February 2025	• Section 1.1 "Supported devices": added AW611 and IW610. Wi-Fi RF test mode • Section 2.4 "Set the radio mode ": added AW611 to the list of supported products. • Section 2.11 "Set TX frame": updated the definition of <code>short GI</code> parameter. Bluetooth RF test mode • Section 3.3.3 "Set Bluetooth LE TX power": added <code>front-end-loss</code> parameter. 802.15.4 RF test mode • Section 4.13 "Set 802.15.4 PHY TX test packet information": added. • Section 4.16.2 "Command sequence to test 802.15.4 radio in receive mode": updated.
AN14114 v.4.0	24 September 2024	Wi-Fi RF test mode • Section 2.1 "List of commands for Wi-Fi RF test mode": added. • Section 2.4 "Set the radio mode ": added a note to radio mode index 9. • Section 2.10 "Set TX continuous mode": added an example for continuous wave mode. • Section 2.11 "Set TX frame": – Updated the range of values for <code>adjust SIFS</code> parameter. – Added a note to the description of <code>adv coding</code> parameter. – Updated the example of command to start TX frame. • Section 2.12.2 "Configure the golden unit and DUT for UL-OFDMA transmission": – Updated the definition of <code>standalone_hetb</code> parameter. – Updated the commands for step 6 and step 7 in the table <i>Steps for HE trigger frame generation</i>. • Section 2.12.3 "Testing standalone UL-OFDMA": – Updated the value of <code>standalone_hetb</code> for <code>trigger_frame</code> command. – Added a step for TX power setting in Table 15. – Changed the bandwidth value changed to 20 MHz for step 4 in Table 15. – Updated the command for step 7, enable standalone trigger frame in Table 15. – Updated the command for step 8, start TX frame in Table 15. • Section 2.13 "Data rates": updated Table 18. • Section 2.16.1 "5 GHz TX command sequence using tx_frame": updated the command for step 7 "Start TX at HE SS1 MCS11 rate". • Section 2.16.3 "2.4 GHz TX command sequence using tx_frame": – Updated the example for 1x1 mode. – Updated step 2 "Set radio mode in 2.4 GHz band with 1x1 mode" – Updated step 7 "Start TX at HE SS1 MCS4 rate". • Section 2.15.1 "2.4 GHz TX command sequence using TX_continuous": updated the command for step 8 "stop TX". ———— (continues) ————

Table 51. Revision history...continued

Document ID	Release date	Description
AN14114 v.4.0	24 September 2024	———— (continued) ———— • Section 2.16.1 "5 GHz TX command sequence using tx_frame": – Updated the example for 1x1 mode. – Updated step 2 "Set radio mode in 2.4 GHz band with 1x1 mode" – Updated step 7 "Start TX at HE SS1 MCS11 rate". • Section 2.16.2 "5 GHz TX command sequence using tx_frame for HE-ER SU": – Updated the example for 1x1 mode. – Updated step 2 "Set radio mode 0 in 5 GHz band with 1x1 mode" – Updated step 7 "Start TX at HE SS1 MCS1 rate". • Section 2.16.3 "2.4 GHz TX command sequence using tx_frame": – Updated the example for 1x1 mode. – Updated step 2 "Set radio mode 1 in 2.4 GHz band with 1x1 mode" – Updated step 7 "Start TX at HE SS1 MCS1 rate". • Section 2.16.4 "5 GHz TX command sequence using tx_continuous": updated step 9 " stop continuous wave mode". • Section 2.16.5 "2.4 GHz TX command sequence using tx_continuous": – Updated the example for 1x1 mode. – Updated step 2 "Set radio mode 1 in 2.4 GHz band with 1x1 mode" – Updated step 9 "Start TX continuous wave mode". Bluetooth RF test mode • Section 3.1 "List of commands for Bluetooth RF test mode": added. RF test mode for 802.15.4 radio • Section 4.1 "List of commands for 802.15.4 RF test mode": added.
AN14114 v.3.0	28 June 2024	• Section 2.4 "Set the radio mode ": extended the applicability of the content to IW611. • Section 2.11 "Set TX frame": added <code>signal Bw</code> parameter. • Section 2.13 "Data rates": updated the table listing 802.11n/a/g/b data rate ID. • Section 2.16 "RF test mode command sequence examples for 88W9098": added. • Section 3.2.6 "Update the parameter settings for RF TX test": added. • Section 3.3.2 "End the receive test and get the packet count": added. • Section 3.4.1 "Bluetooth Classic TX test": updated. • Section 3.4.2 "Bluetooth Classic RX Test": updated.
AN14114 v.2.0	15 April 2024	• Section 2.13 "Data rates": added the table with 802.11ac data rate ID.
AN14114 v.1.0	7 February 2024	• Initial version

Legal information

Definitions

Draft — A draft status on a document indicates that the content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included in a draft version of a document and shall have no liability for the consequences of use of such information.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Suitability for use in non-automotive qualified products — Unless this document expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

HTML publications — An HTML version, if available, of this document is provided as a courtesy. Definitive information is contained in the applicable document in PDF format. If there is a discrepancy between the HTML document and the PDF document, the PDF document has priority.

Translations — A non-English (translated) version of a document, including the legal information in that document, is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Security — Customer understands that all NXP products may be subject to unidentified vulnerabilities or may support established security standards or specifications with known limitations. Customer is responsible for the design and operation of its applications and products throughout their lifecycles to reduce the effect of these vulnerabilities on customer's applications and products. Customer's responsibility also extends to other open and/or proprietary technologies supported by NXP products for use in customer's applications. NXP accepts no liability for any vulnerability. Customer should regularly check security updates from NXP and follow up appropriately.

Customer shall select products with security features that best meet rules, regulations, and standards of the intended application and make the ultimate design decisions regarding its products and is solely responsible for compliance with all legal, regulatory, and security related requirements concerning its products, regardless of any information or support that may be provided by NXP.

NXP has a Product Security Incident Response Team (PSIRT) (reachable at PSIRT@nxp.com) that manages the investigation, reporting, and solution release to security vulnerabilities of NXP products.

NXP B.V. — NXP B.V. is not an operating company and it does not distribute or sell products.

Trademarks

Notice: All referenced brands, product names, service names, and trademarks are the property of their respective owners.

NXP — wordmark and logo are trademarks of NXP B.V.

Bluetooth — the Bluetooth wordmark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by NXP Semiconductors is under license.

Tables

Tab. 1.	List of commands for Wi-Fi RF test mode	3	Tab. 25.	5 GHz TX command sequence using tx_	
Tab. 2.	Command parameters	5		continuous	30
Tab. 3.	Radio mode index values for 88W9098	6	Tab. 26.	2.4 GHz TX command sequence using tx_	
Tab. 4.	Radio mode index values for AW611, IW611, and IW612	6		continuous	31
Tab. 5.	Command parameters	7	Tab. 27.	5 GHz RX command sequence	32
Tab. 6.	Command parameters	7	Tab. 28.	2.4 GHz RF command sequence	33
Tab. 7.	Command parameters	7	Tab. 29.	List of commands for Wi-Fi RF test mode	34
Tab. 8.	Command parameters	9	Tab. 30.	Command parameters	36
Tab. 9.	Command parameters	10	Tab. 31.	Command parameters	38
Tab. 10.	Command parameters	11	Tab. 32.	Parameter settings to test Bluetooth TX	
Tab. 11.	Command parameters	14		hopping mode dwell time	40
Tab. 12.	Steps for HE-trigger frame generation on the golden unit	16	Tab. 33.	Command parameters	41
Tab. 13.	Command parameters	18	Tab. 34.	Command parameters	43
Tab. 14.	Steps for HE-trigger response frame generation on the DUT	18	Tab. 35.	Command parameters	44
Tab. 15.	Steps for standalone UL-OFDMA test example (Wi-Fi 5 GHz, 1x1 path A, 80 MHz frequency band)	19	Tab. 36.	Bluetooth Classic TX command sequence	46
Tab. 16.	802.11n/a/g/b data rate ID	20	Tab. 37.	Bluetooth Classic RX command sequence	46
Tab. 17.	802.11ac data rate ID	21	Tab. 38.	Bluetooth LE TX command sequence	47
Tab. 18.	802.11ac/802.11ax data rate ID	22	Tab. 39.	Bluetooth LE RX command sequence	47
Tab. 19.	Wi-Fi channel list	24	Tab. 40.	List of commands for Wi-Fi RF test mode	48
Tab. 20.	2.4 GHz TX command sequence using TX_ continuous	25	Tab. 41.	Command parameters	50
Tab. 21.	5 GHz RX command sequence	26	Tab. 42.	Command parameters	50
Tab. 22.	5 GHz TX command sequence using tx_ frame	27	Tab. 43.	Command parameters	51
Tab. 23.	5 GHz TX command sequence using tx_ frame for HE-ER SU	28	Tab. 44.	Command parameters	51
Tab. 24.	2.4 GHz TX command sequence using tx_ frame	29	Tab. 45.	Command parameters	52
			Tab. 46.	Command parameters	53
			Tab. 47.	Command parameters	53
			Tab. 48.	802.15.4 radio transmit duty cycle mode command sequence	55
			Tab. 49.	802.15.4 radio receive mode command sequence	55
			Tab. 50.	Abbreviations	56
			Tab. 51.	Revision history	59

Figures

Fig. 1.	Example of command output with rf_test_ mode enabled	4	Fig. 3.	RU index values for 20 MHz bandwidth	16
Fig. 2.	Test setup	13	Fig. 4.	RU index values for 40 MHz bandwidth	17
			Fig. 5.	RU index values for 80 MHz bandwidth	17

Contents

1	Introduction	2			
1.1	Supported devices	2	3.3.1	Test Bluetooth LE receiver	41
2	Wi-Fi RF test mode	3	3.3.2	End the receive test and get the packet count	42
2.1	List of commands for Wi-Fi RF test mode	3	3.3.3	Set Bluetooth LE TX power	43
2.2	Enable RF test mode and check RF parameters	4	3.3.4	Test Bluetooth LE transmitter	44
2.3	Set TX/RX antenna configuration	5	3.3.5	End Bluetooth LE test	45
2.4	Set the radio mode	6	3.4	RF test mode command sequence examples	46
2.5	Set the operating RF band	7	3.4.1	Bluetooth Classic TX test	46
2.6	Set the channel bandwidth	7	3.4.2	Bluetooth Classic RX Test	46
2.7	Set the RF channel	7	3.4.3	Bluetooth LE TX test	47
2.8	Get and reset the packet error rate	8	3.4.4	Bluetooth LE RX test	47
2.9	Set TX power	9	4	RF test mode for 802.15.4	48
2.10	Set TX continuous mode	10	4.1	List of commands for 802.15.4 RF test mode	48
2.11	Set TX frame	11	4.2	Enable or disable 802.15.4 RF test mode	49
2.12	Testing 802.11ax Uplink-OFDMA transmit	13	4.3	Reset 802.15.4 radio	49
2.12.1	Test setup	13	4.4	Get the RF channel	49
2.12.2	Configure the golden unit and DUT for UL- OFDMA transmission	14	4.5	Set the RF channel	50
2.12.3	Testing standalone UL-OFDMA	19	4.6	Get TX power level value	50
2.13	Data rates	20	4.7	Set TX power level value	50
2.14	Wi-Fi channels	24	4.8	Continuous TX	51
2.15	RF test mode command sequence examples	25	4.9	Get TX payload size	51
2.15.1	2.4 GHz TX command sequence using tx_ continuous	25	4.10	Set TX packet payload size	51
2.15.2	5 GHz RX command sequence	26	4.11	802.15.4 TX burst packet	52
2.16	RF test mode command sequence examples for 88W9098	27	4.12	Set 802.15.4 TX duty cycle	53
2.16.1	5 GHz TX command sequence using tx_ frame	27	4.13	Set 802.15.4 PHY TX test packet information	53
2.16.2	5 GHz TX command sequence using tx_ frame for HE-ER SU	28	4.14	Start 802.15.4 RX test	54
2.16.3	2.4 GHz TX command sequence using tx_ frame	29	4.15	Get 802.15.4 RX test result	54
2.16.4	5 GHz TX command sequence using tx_ continuous	30	4.16	Command sequence examples to test 802.15.4 radio	55
2.16.5	2.4 GHz TX command sequence using tx_ continuous	31	4.16.1	Command sequence to test 802.15.4 radio transmit duty cycle mode	55
2.16.6	5 GHz RX command sequence	32	4.16.2	Command sequence to test 802.15.4 radio in receive mode	55
2.16.7	2.4 GHz RX command sequence	33	5	Abbreviations	56
3	Bluetooth RF test mode	34	6	References	57
3.1	List of commands for Bluetooth RF test mode	34	7	Note about the source code in the document	58
3.2	Bluetooth Classic	35	8	Revision history	59
3.2.1	Enable test mode for qualification	35		Legal information	61
3.2.2	Set the receive test parameters	36			
3.2.3	End the receive test	37			
3.2.4	Set the transmit test parameters	38			
3.2.5	End the transmit command	39			
3.2.6	Update the parameter settings for RF TX test	40			
3.3	Bluetooth Low Energy (LE)	41			

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.